

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

A3

D

C

B

A



D

C


B

A


Product No. 103202003	
Nominal flow Ø DN:	6,4 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 5/16" 8mm
Sealing material:	NBR
Hexagon:	20

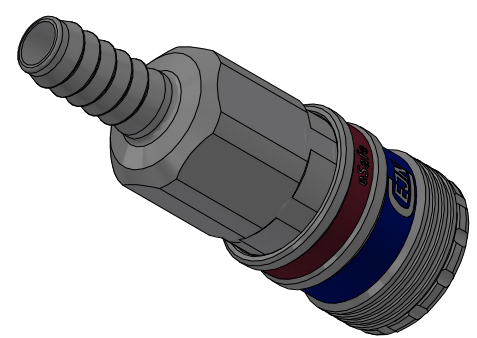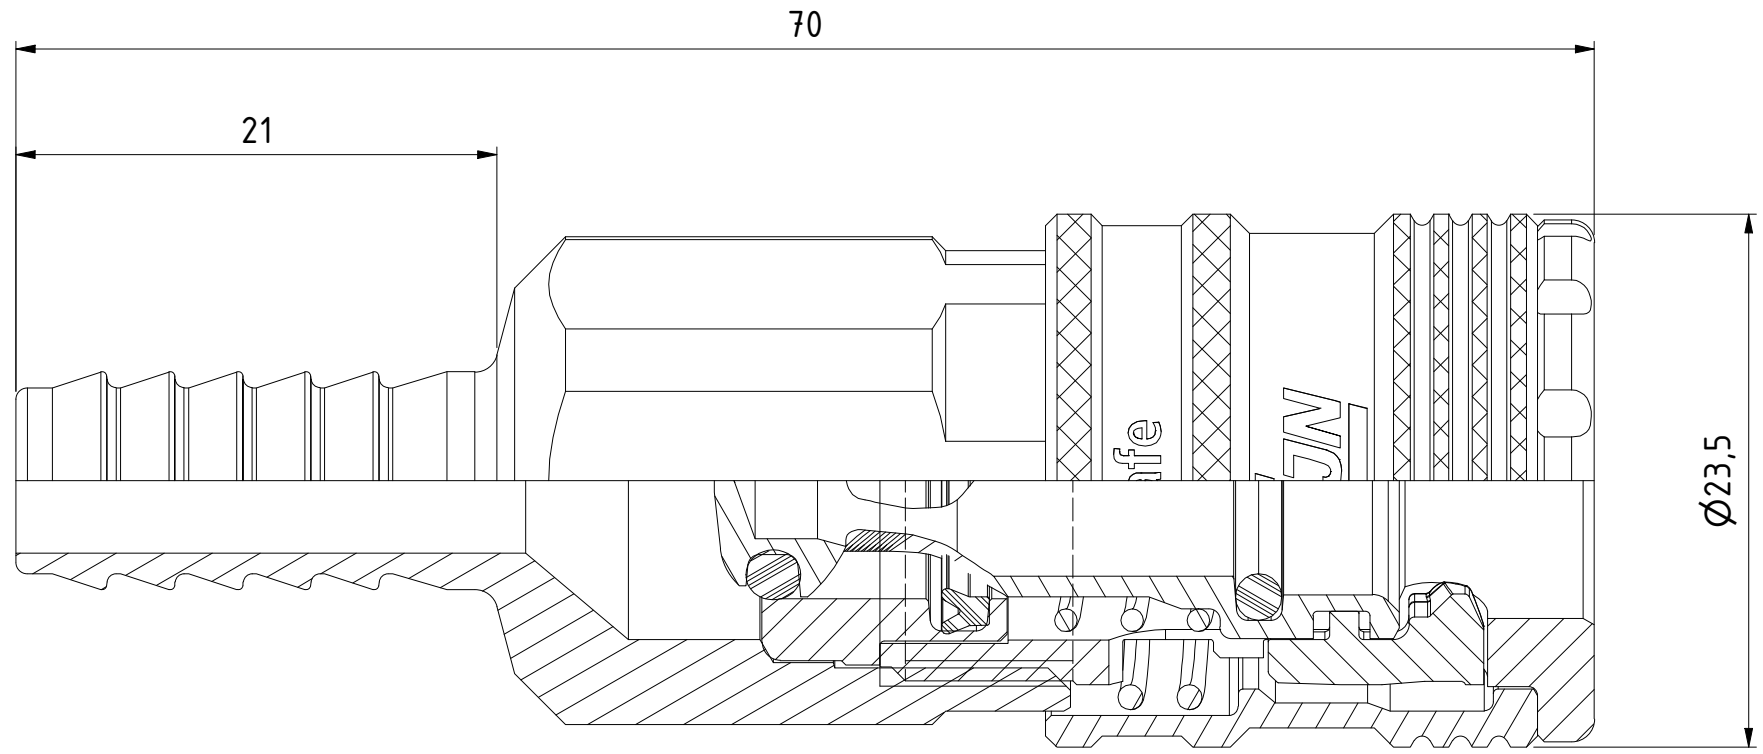


1 : 1



13	1	Valve seat	Aluminium Lead Free
12	1	Valve	Aluminium Lead Free
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Back part	Steel, Zn 8 Silver
8	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn 8 silver
Item	Qty	Description	Material

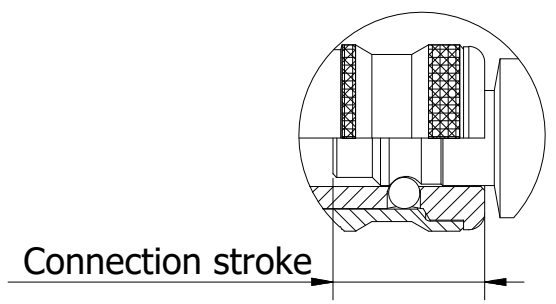

Connection stroke

State Production		Drawn CABLIJA	Checked ALAL	Approved OSJO	Date 2025-01-16
 Coupling 5/16" hose NBR - eSafe		ECO 002136		Former No.	
		Drawing No. 103202003		Issue C	Scale 3 : 1 Sheet 1 /(1 )