

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©




A

B



C

D


Product No. 103202005	
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 1/2" 13mm
Sealing material:	NBR
Hexagon:	20

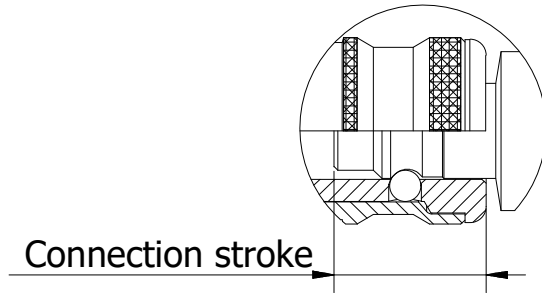

Connection stroke

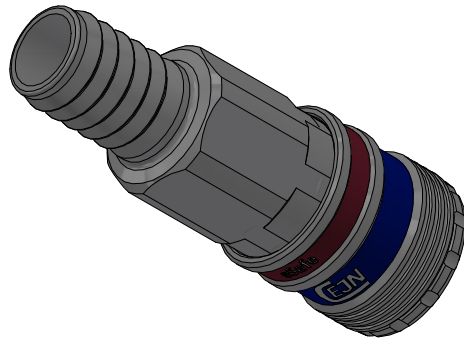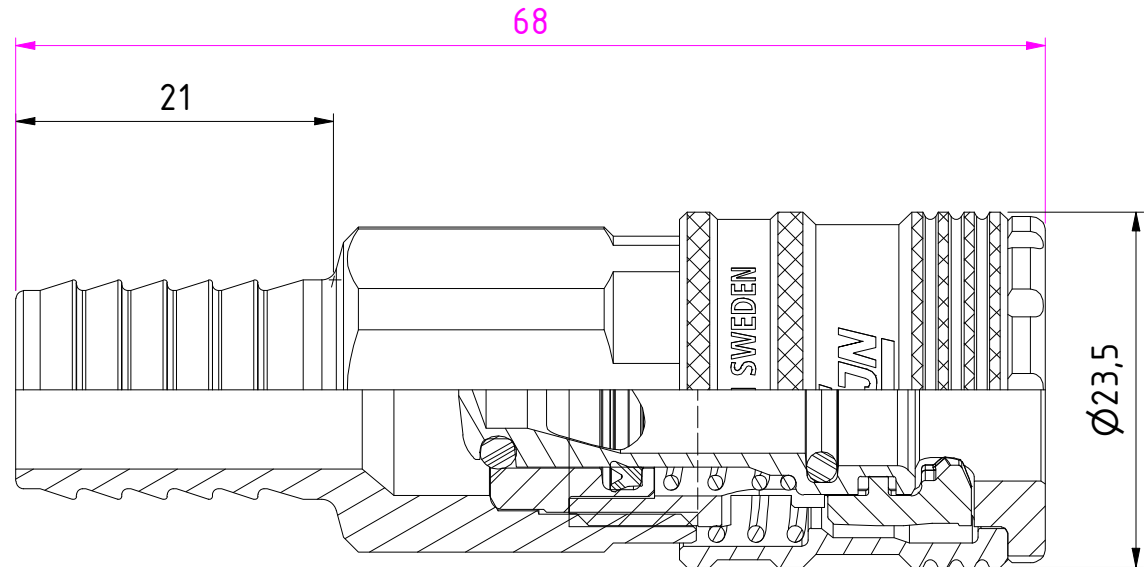

1 : 1



11	1	Valve seat	Aluminium Lead Free
10	1	Valve	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material			
State		Drawn	Checked	Approved	Date	
Production		CABLIJA	ALAL	OSJO	2025-01-16	
 Coupling 1/2" hose NBR - eSafe			ECO	Former No.		Scale
			002136			2 : 1
			Drawing No.	Issue		Sheet
			103202005	C		1 /(1)