
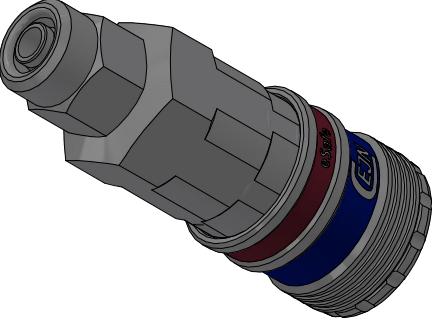


| | |
|-------------------------|-----------------|
| Product No. | 103202058 |
| Nominal flow ϕ DN: | 4,5 mm |
| Connection Stroke: | 19,2 mm |
| Max WP Connected: | 10 bar * |
| Min BP Connected: | 25 bar * |
| Temperature range: | -20°C - +100°C |
| Connection: | Stream-Line 5x8 |
| Sealing material: | NBR |
| Hexagon: | 14/20 |


D

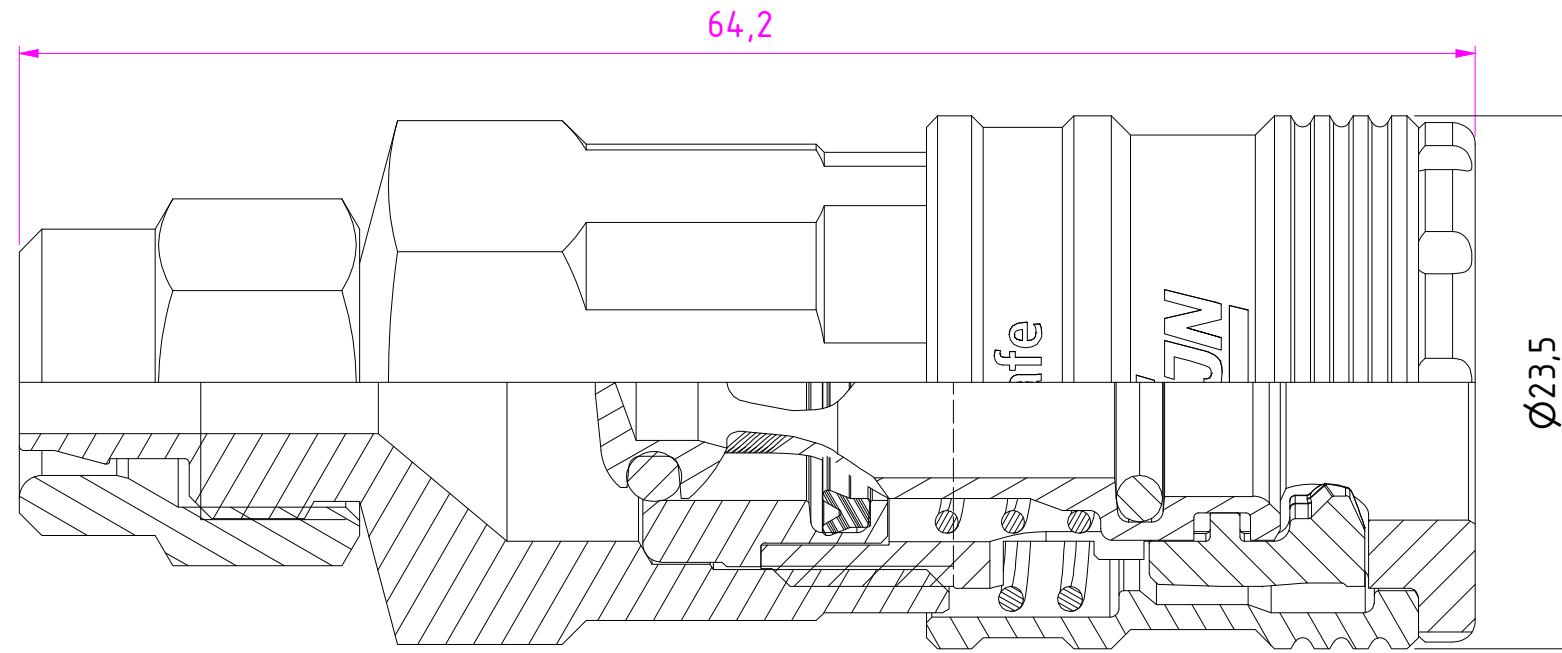

1 : 1

* WP/BP is valid with CEJN non-braided hose

| Item | Qty | Description | | Material | |
|------------|-----|----------------|-------|------------------------------|------------|
| | | State | Drawn | Checked | Date |
| Production | | CABALAL | LIJA | OSJO | 2025-01-30 |
| 12 | 1 | Valve seat | | Aluminium Lead Free | |
| 11 | 1 | Valve | | Aluminium Lead Free | |
| 10 | 1 | Spring | | Stainless steel | |
| 9 | 1 | Spring | | Stainless steel | |
| 8 | 1 | Lip seal | | NBR | |
| 7 | 1 | O-ring | | NBR | |
| 6 | 1 | O-ring | | NBR | |
| 5 | 1 | Locking sleeve | | Hard. steel, Zn 8 Silver | |
| 4 | 2 | Hook | | Hard. Steel, Zn-Ni 8 transp. | |
| 3 | 1 | Front part | | Hard. Steel, Zn 8 silver | |
| 2 | 1 | Swivel nut | | Steel, Zn 8 Silver | |
| 1 | 1 | Back part | | Steel, Zn 8 Silver | |
| | | | | | |
| | | | | | |

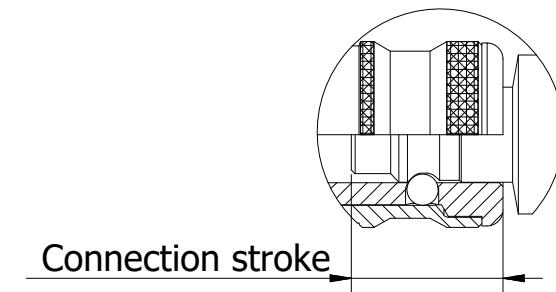

Connection stroke



Coupling Stream-Line 5 x 8
mm NBR - eSafe

ECO
002136
Drawing No.
103202058

Former No.
Issue
C
Sheet
1 / (1)