

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B


A

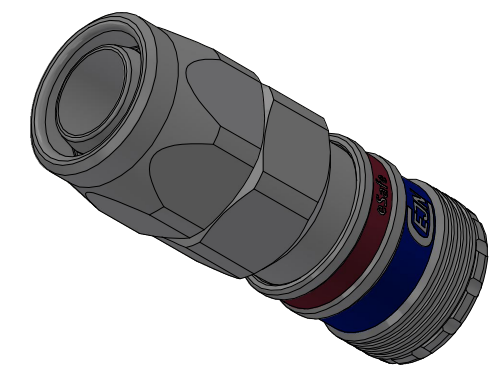

1 : 1

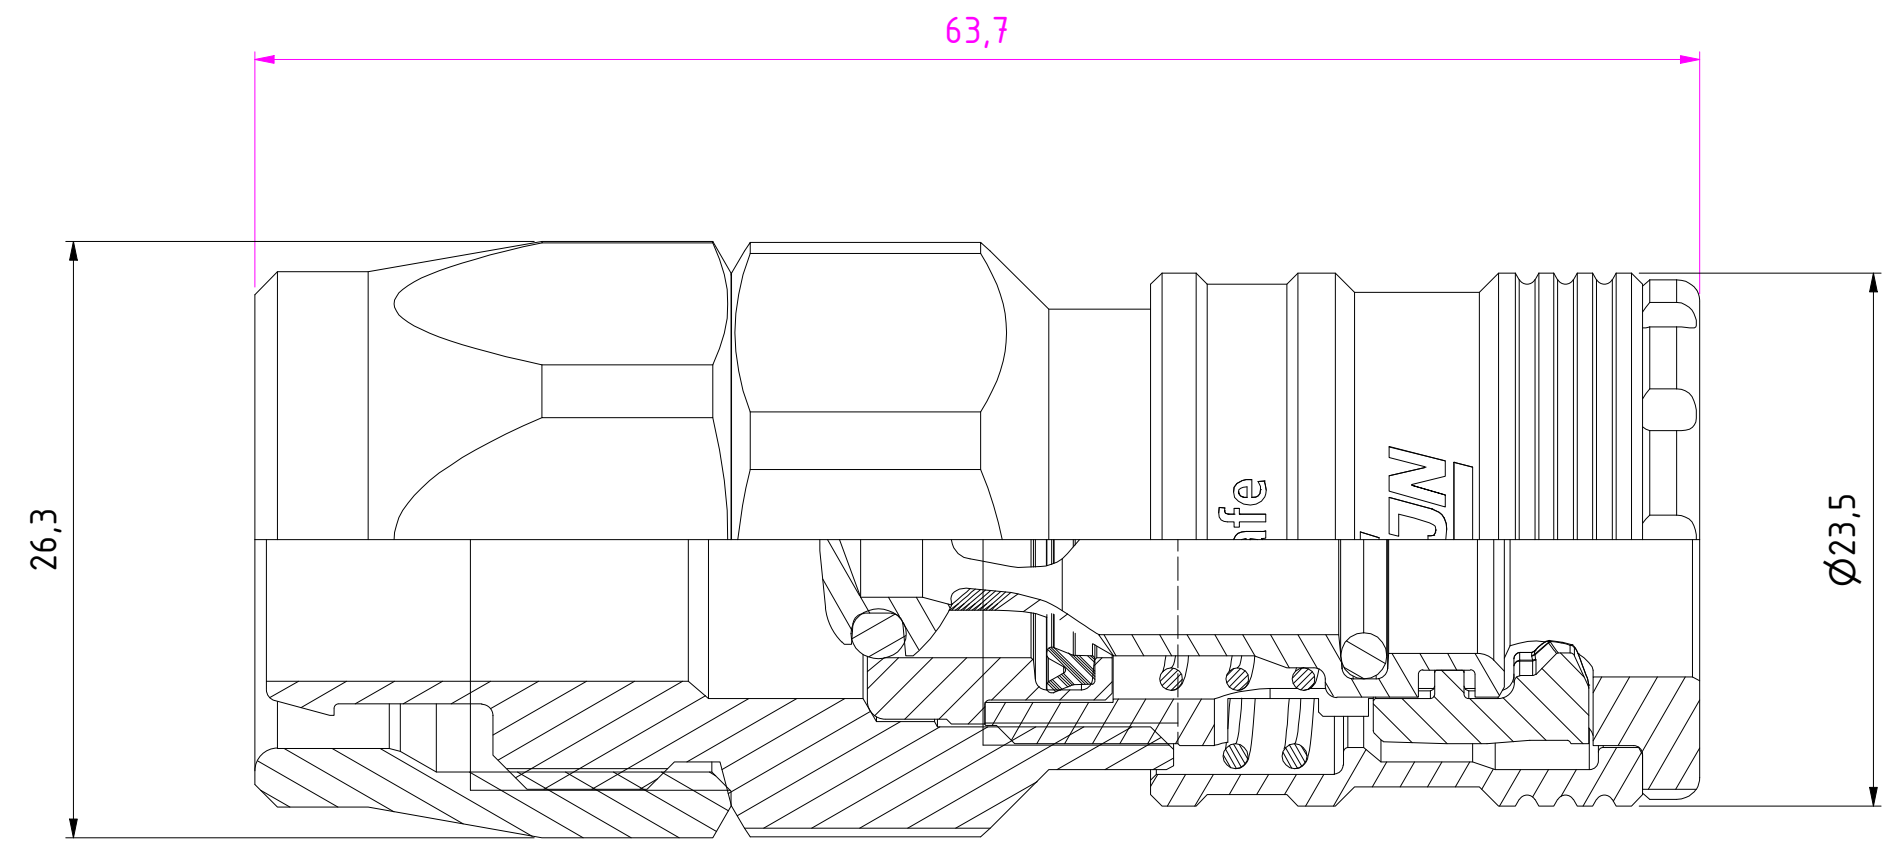

Product No.	103202068
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	10 bar w. CEJN braided PUR hose
Min BP Connected:	40 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-line 13x18
Sealing material:	NBR
Hexagon:	24 (2x)

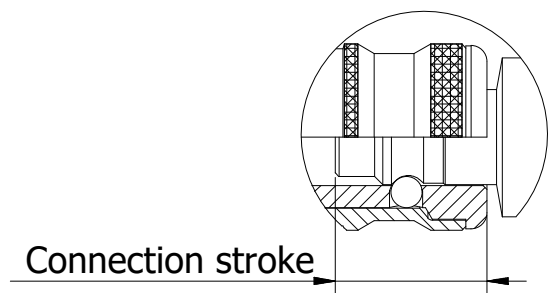

Connection stroke

D	12	1	Valve seat	Aluminium Lead Free
	11	1	Valve	Aluminium Lead Free
	10	1	Spring	Stainless steel
	9	1	Spring	Stainless steel
	8	1	Lip seal	NBR
	7	1	O-ring	NBR
	6	1	O-ring	NBR
	5	1	Locking sleeve	Hard. steel, Zn 8 Silver
	4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
	3	1	Front part	Hard. Steel, Zn 8 silver
	2	1	Swivel nut 13x18	Steel, Zn 8 Silver
	1	1	Back part 13x18	Steel, Zn 8 silver
Item		Qty	Description	Material
State			Drawn	Checked
Production			CABALAL	LIJA
			Approved	Date
			OSJO	2025-01-30
			ECO	Scale
			002136	1 : 1
			Former No.	
			Drawing No.	Issue
			103202068	D
			Coupling Stream-Line 13 x 18 mm NBR - eSafe	Sheet
				1 /(1)