

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

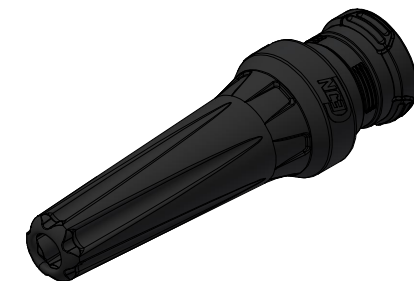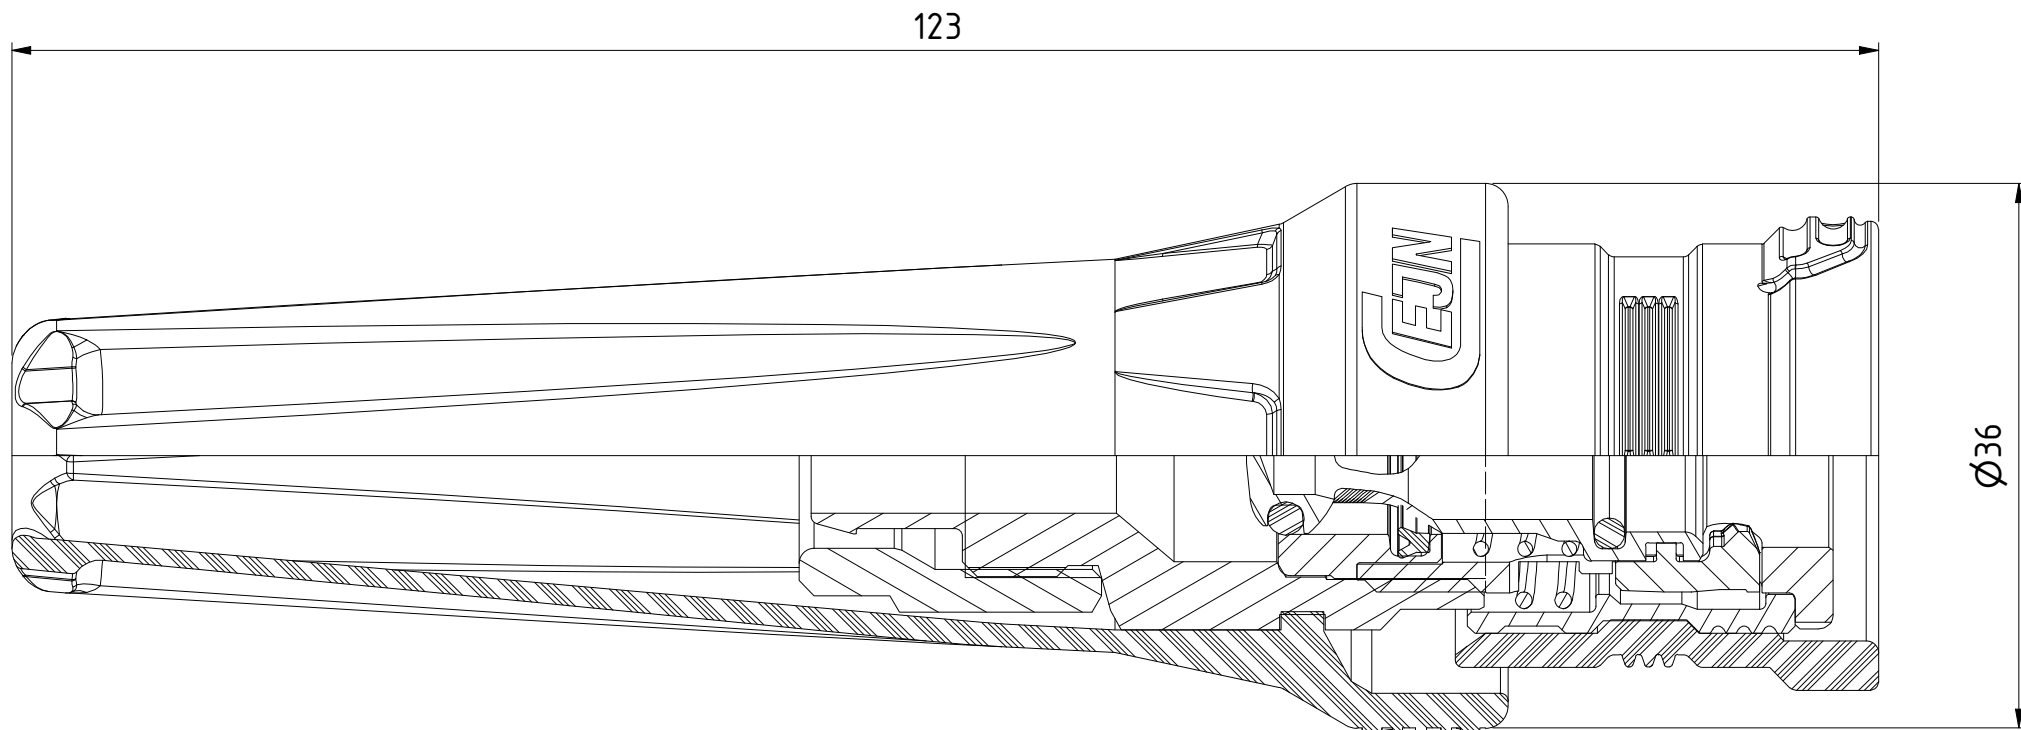

1 : 2


D

C

B

A

Product No.	103202082
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 8x12
Sealing material:	NBR
Hexagon:	19/21

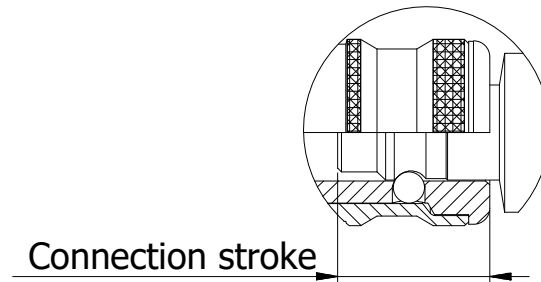

Connection stroke



14	1	Back Part Cover	Rubber			
13	1	Locking Sleeve Cover	Rubber			
12	1	Swivel nut 8x12	Steel, Zn 8 Silver			
11	1	Back part	Aluminium			
10	1	Spring	Stainless steel			
9	1	Spring	Stainless steel			
8	1	Lip seal	NBR			
7	1	Valve seat	Aluminium Lead Free			
6	1	O-ring	NBR			
5	1	O-ring	NBR			
4	1	Valve	Aluminium Lead Free			
3	1	Locking sleeve	Hard. steel, Zn 8 Silver			
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.			
1	1	Front part	Hard. Steel, Zn 8 silver			
Item	Qty	Description	Material			
State Production		Drawn CABLIJA	Checked ALAL	Approved OSJO	Date 2025-05-08	
		ECO 002136		Former No.	Scale 2 : 1	
		Drawing No. 103202082			Issue D	Sheet 1 /(1)



Coupling Stream-Line 8 x 12 mm NBR - eSafe, Soft-Line

002136

103202082