

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A

B

C

D


Product No. 103202092	
Nominal flow Ø DN:	7,4 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-line 8x12
Sealing material:	NBR
Hexagon:	See drawing

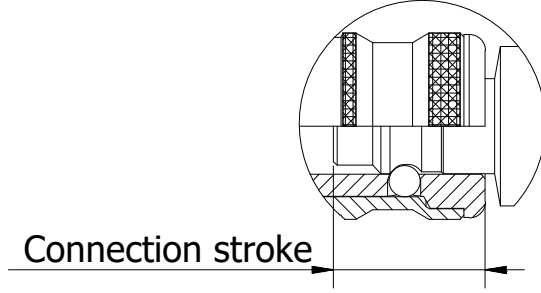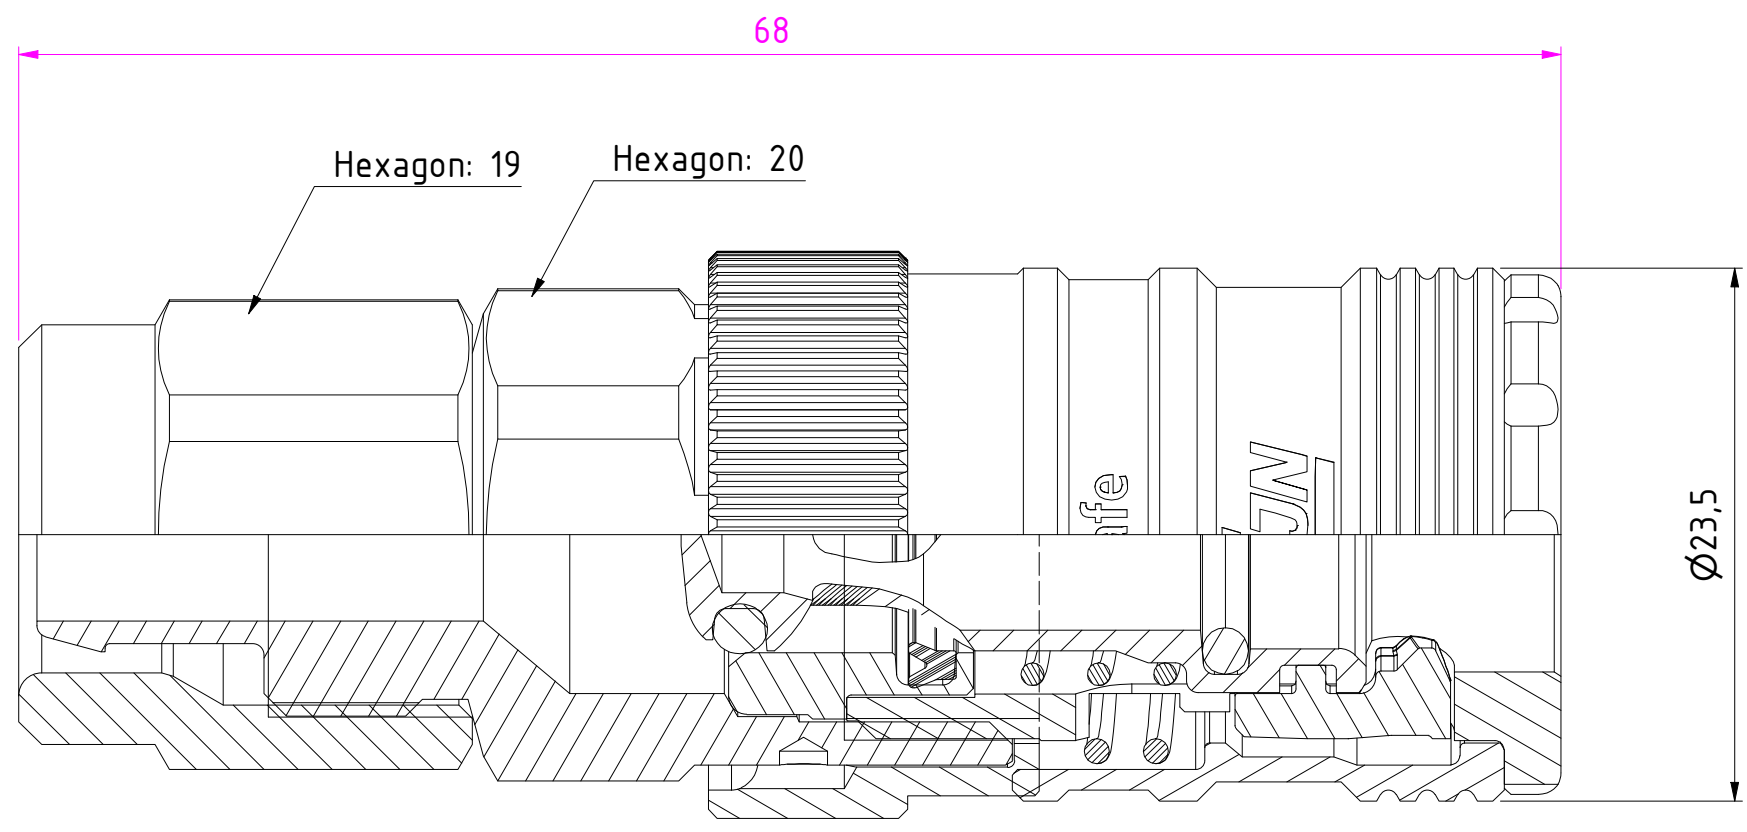

E	13	1	Valve seat	Aluminium Lead Free	
	12	1	Valve	Aluminium Lead Free	
	11	1	Spring	Stainless steel	
	10	1	Spring	Stainless steel	
	9	1	Lip seal	NBR	
	8	1	O-ring	NBR	
	7	1	O-ring	NBR	
	6	1	Locking sleeve	Hard. steel, Zn 8 Silver	
	5	2	Hook	Hard. Steel, Zn-Ni 8 transp.	
	4	1	Front part	Hard. Steel, Zn 8 silver	
	3	1	Swivel nut 8x12	Steel, Zn 8 Silver	
	2	1	Twist sleeve	Hard. Steel, Zn-Ni 10 black	
	1	1	Back part 8x12	Steel, Zn 8 Silver	
Item		Qty	Description	Material	
State			Drawn	Checked	Approved
Production			CABALAL	LIJA	OSJO
			ECO		Date
			002136		2025-01-30
			Former No.		Scale
					3 : 1
			Drawing No.		Issue
			103202092		Sheet
					1 /(1)
					E



Coupling Stream-Line 8x12
NBR - eSafe Safety Lock

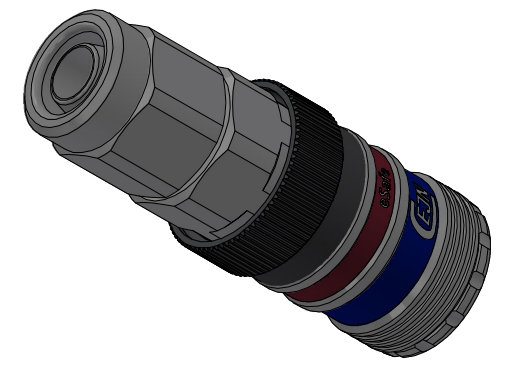

1 : 1

B

C

D

A