

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

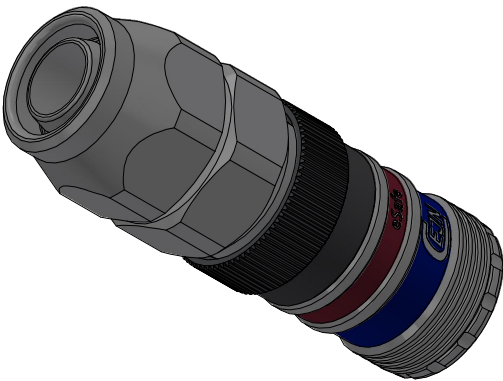


1 : 1

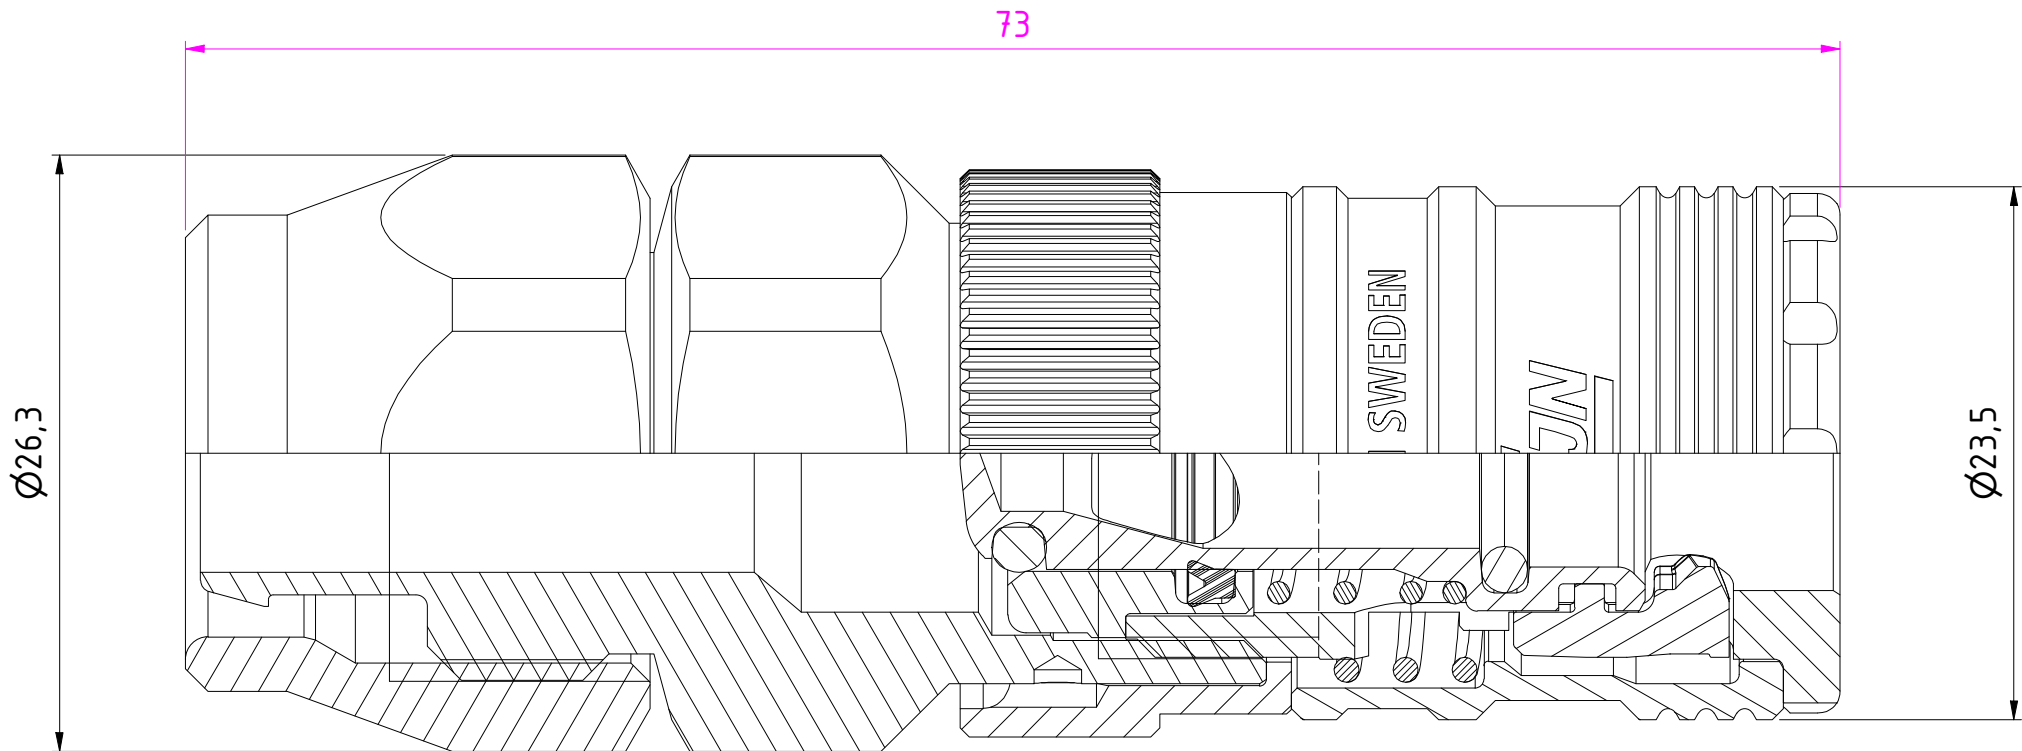

13	1	Valve seat	Aluminium Lead Free
12	1	Valve	Aluminium Lead Free
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Lip seal	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Hard. steel, Zn 8 Silver
5	2	Hook	Hard. Steel, Zn-Ni 8 transp.
4	1	Front part	Hard. Steel, Zn 8 silver
3	1	Swivel nut 11x16	Steel, Zn 8 Silver
2	1	Twist sleeve	Hard. Steel, Zn-Ni 10 black
1	1	Back part 11x16	Steel, Zn 8 Silver

Item	Qty	Description		Material		
State		Drawn	Checked	Approved	Date	
Production		CABALAL	LIJA	OSJO	2025-01-30	
	Coupling Stream-Line 11x16 NBR - eSafe Safety Lock		ECO	Former No.		Scale
			002136			3 : 1
			Drawing No.		Issue	Sheet
			103202096		D	1 /(1)



Connection stroke

Product No.	103202096
Nominal flow $\varnothing$ DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Steam-Line 11x16
Sealing material:	NBR
Hexagon:	24 (2x)