

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

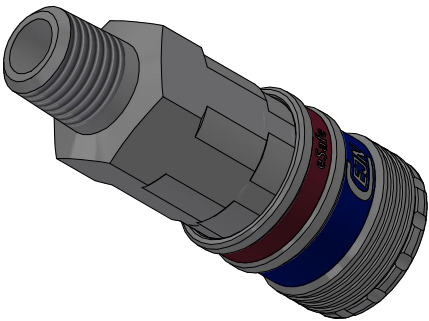


1 : 1

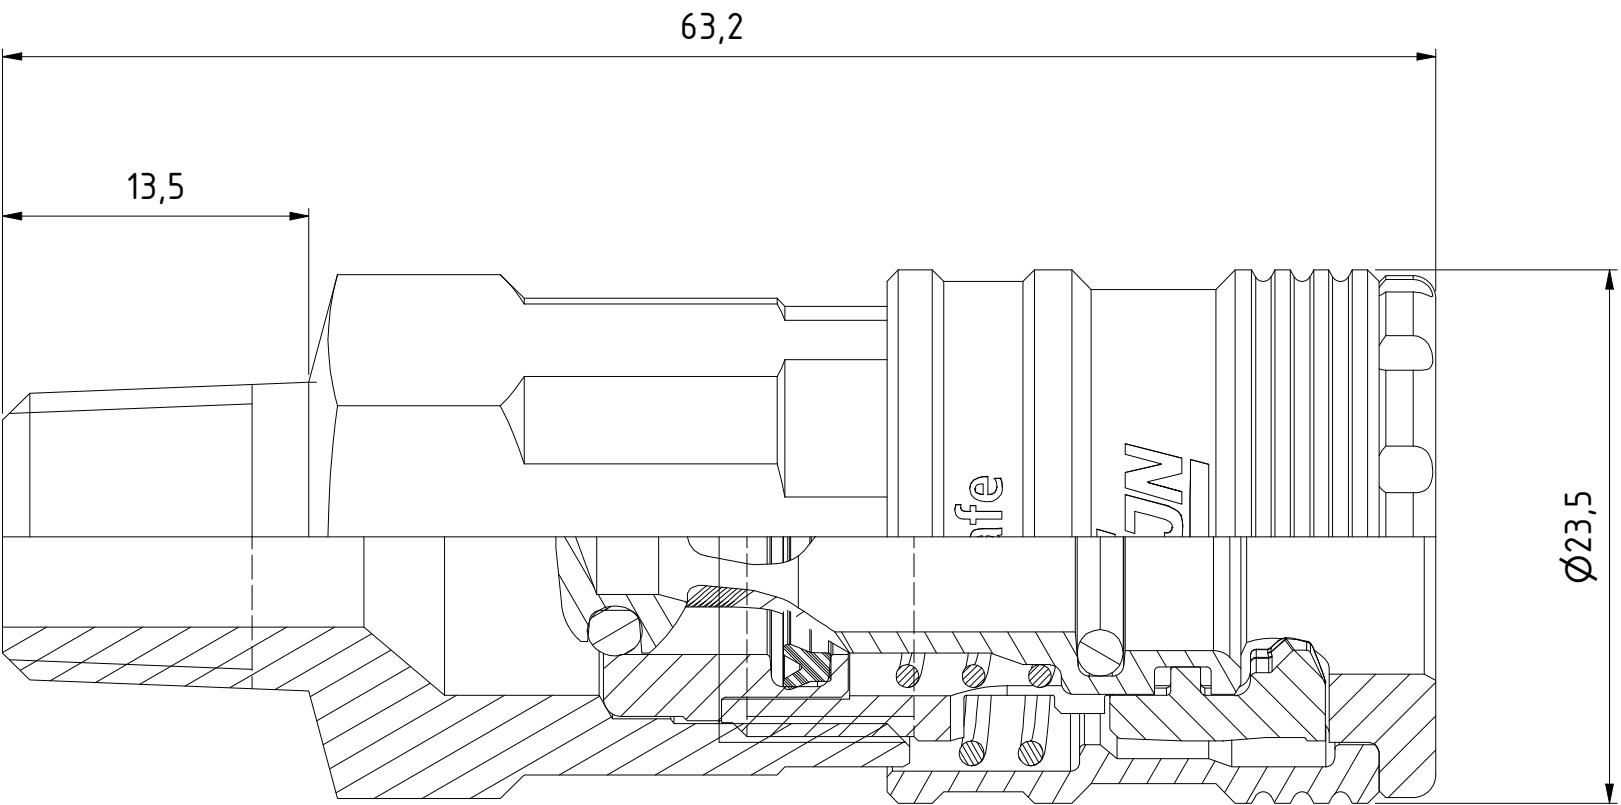

|    |   |                |                              |
|----|---|----------------|------------------------------|
| 11 | 1 | Valve seat     | Aluminium Lead Free          |
| 10 | 1 | Valve          | Aluminium Lead Free          |
| 9  | 1 | Spring         | Stainless steel              |
| 8  | 1 | Spring         | Stainless steel              |
| 7  | 1 | Lip seal       | NBR                          |
| 6  | 1 | O-ring         | NBR                          |
| 5  | 1 | O-ring         | NBR                          |
| 4  | 1 | Locking sleeve | Hard. steel, Zn 8 Silver     |
| 3  | 2 | Hook           | Hard. Steel, Zn-Ni 8 transp. |
| 2  | 1 | Front part     | Hard. Steel, Zn 8 silver     |
| 1  | 1 | Back part      | Steel, Zn 8 silver           |

| Item                                                                                                                   | Qty | Description | Material |            |            |         |
|------------------------------------------------------------------------------------------------------------------------|-----|-------------|----------|------------|------------|---------|
| State                                                                                                                  |     | Drawn       | Checked  | Approved   | Date       |         |
| Production                                                                                                             |     | CABALAL     | LIJA     | OSJO       | 2025-01-30 |         |
|  Coupling R 1/4" male NBR - eSafe |     |             | ECO      | Former No. |            | Scale   |
|                                                                                                                        |     |             | 002136   |            |            | 3 : 1   |
| Drawing No.                                                                                                            |     |             |          |            | Issue      | Sheet   |
| 103202152                                                                                                              |     |             |          |            | B          | 1 /(1 ) |



Connection stroke

|                    |                |
|--------------------|----------------|
| Product No.        | 103202152      |
| Nominal flow Ø DN: | 7,6 mm         |
| Connection Stroke: | 19,2 mm        |
| Max WP Connected:  | 16 bar         |
| Min BP Connected:  | 140 bar        |
| Temperature range: | -20°C - +100°C |
| Connection:        | R 1/4" Male    |
| Sealing material:  | NBR            |
| Hexagon:           | 20             |