

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B

A



D

C


B

A

Product No. 103202155	
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	R 1/2" Male
Sealing material:	NBR
Hexagon:	22

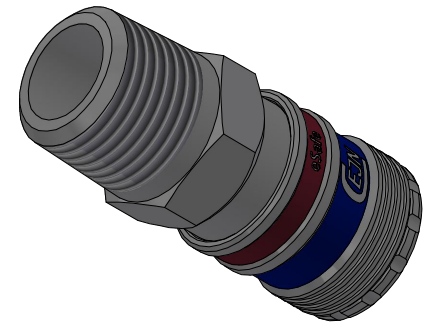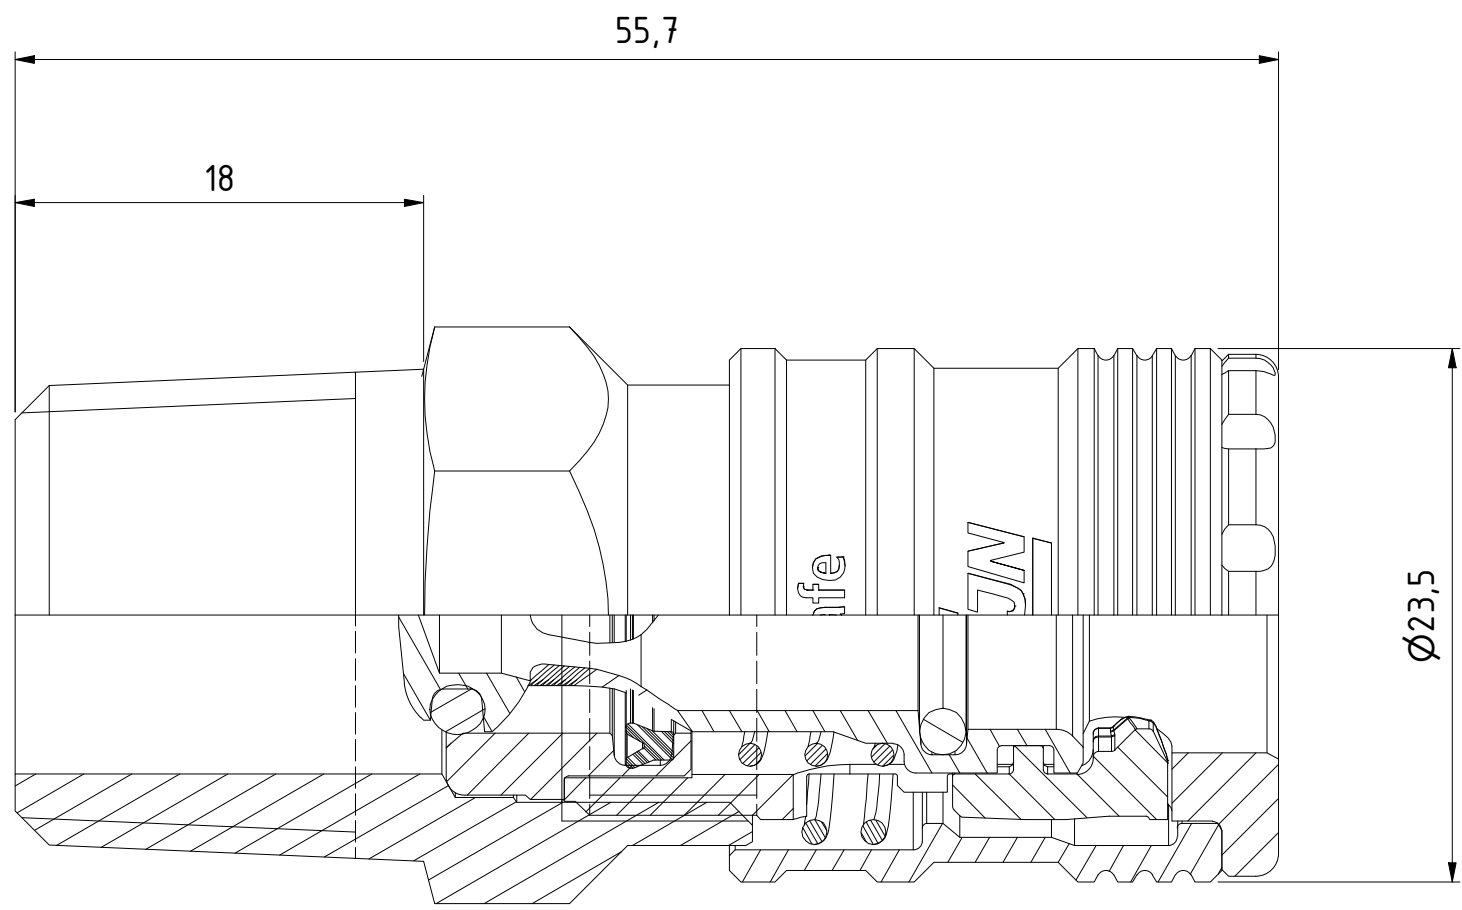


1 : 1



11	1	Valve seat	Aluminium Lead Free
10	1	Valve	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 silver
1	1	Back part	Steel, Zn 8 silver

Item	Qty	Description	Material	
State		Drawn	Checked	Approved
Production		CABALAL	LIJA	OSJO
Date		2025-02-14		
ECO		002136	Former No.	Scale
Drawing No.		103202155		3 : 1
Issue		B	Sheet	1 /(1)

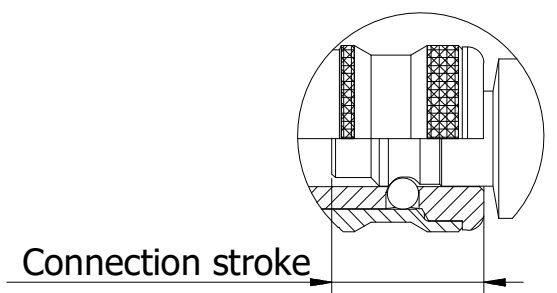

Connection stroke



Coupling R 1/2" male NBR - eSafe