

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D


C

B

A

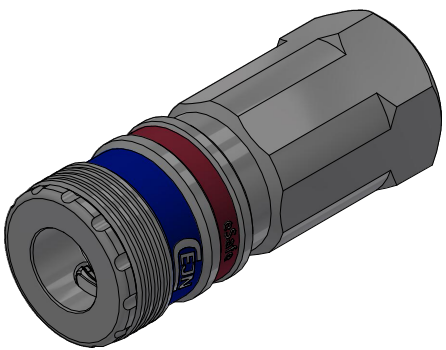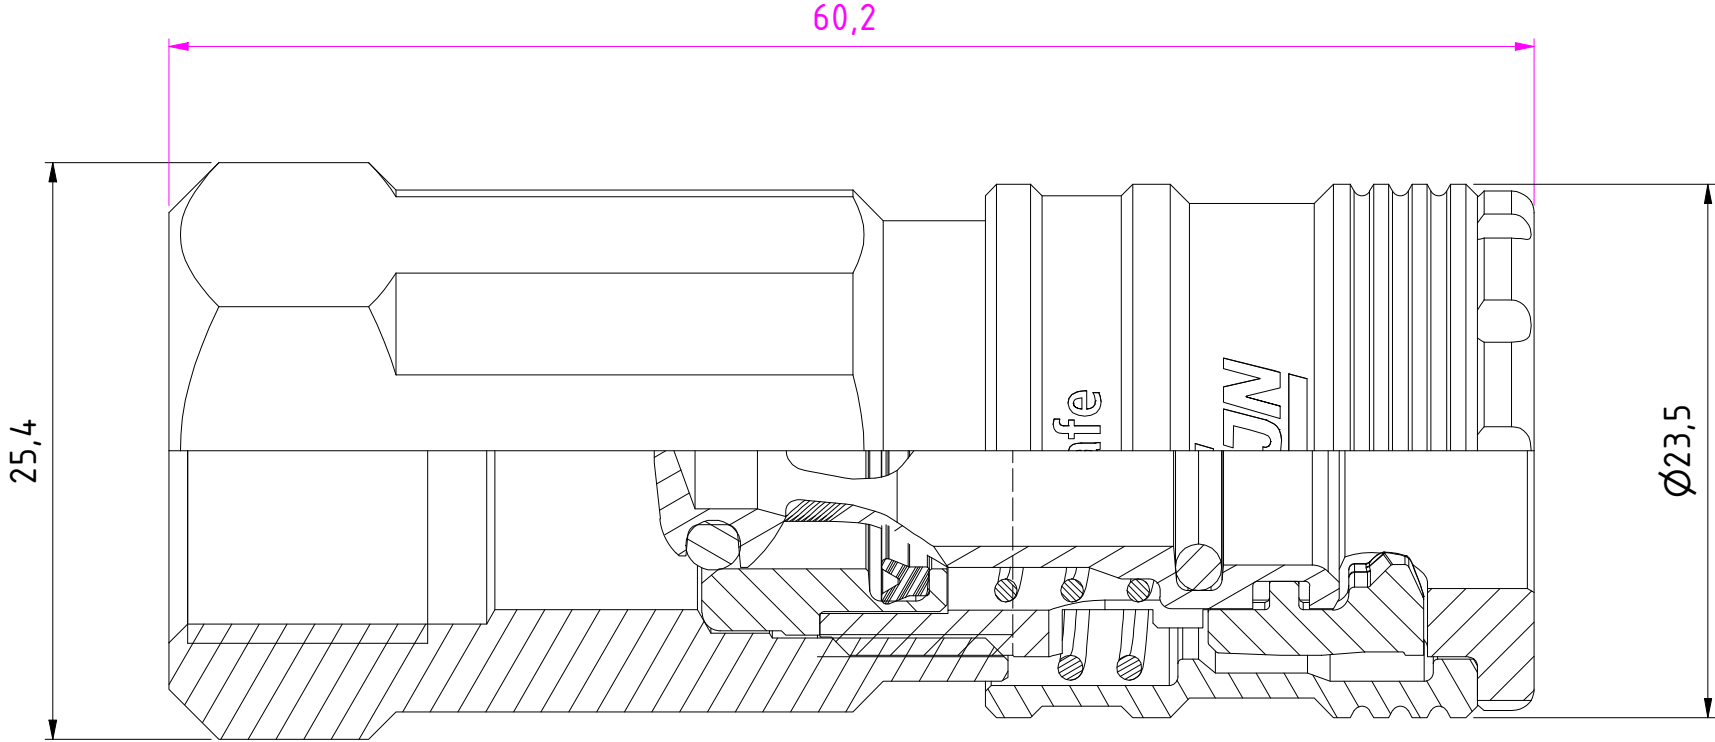


1 : 1



13	1	Valve seat	Aluminium Lead Free
12	1	Valve	Aluminium Lead Free
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Back part	Steel, Zn 8 Silver
8	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn 8 silver
Item	Qty	Description	Material

State	Drawn	Checked	Approved	Date
Production	CABALAL	LIJA	OSJO	2025-01-30
ECO		002136	Former No.	Scale
Drawing No.		103202204	Issue	Sheet
			B	1 /(1)

Product No.	103202204
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	G 3/8" fem
Sealing material:	NBR
Hexagon:	22

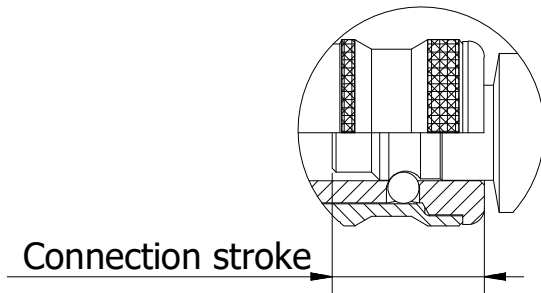

Connection stroke



Coupling G 3/8" fem NBR - eSafe