

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

Product No. 103202244	
Nominal flow Ø DN:	7,6 mm
Connection Stroke:	19,2 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	G 3/8" fem
Sealing material:	NBR
Hexagon:	22

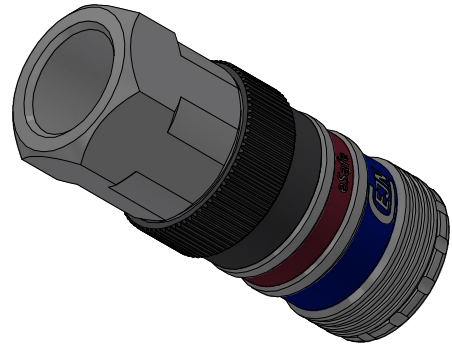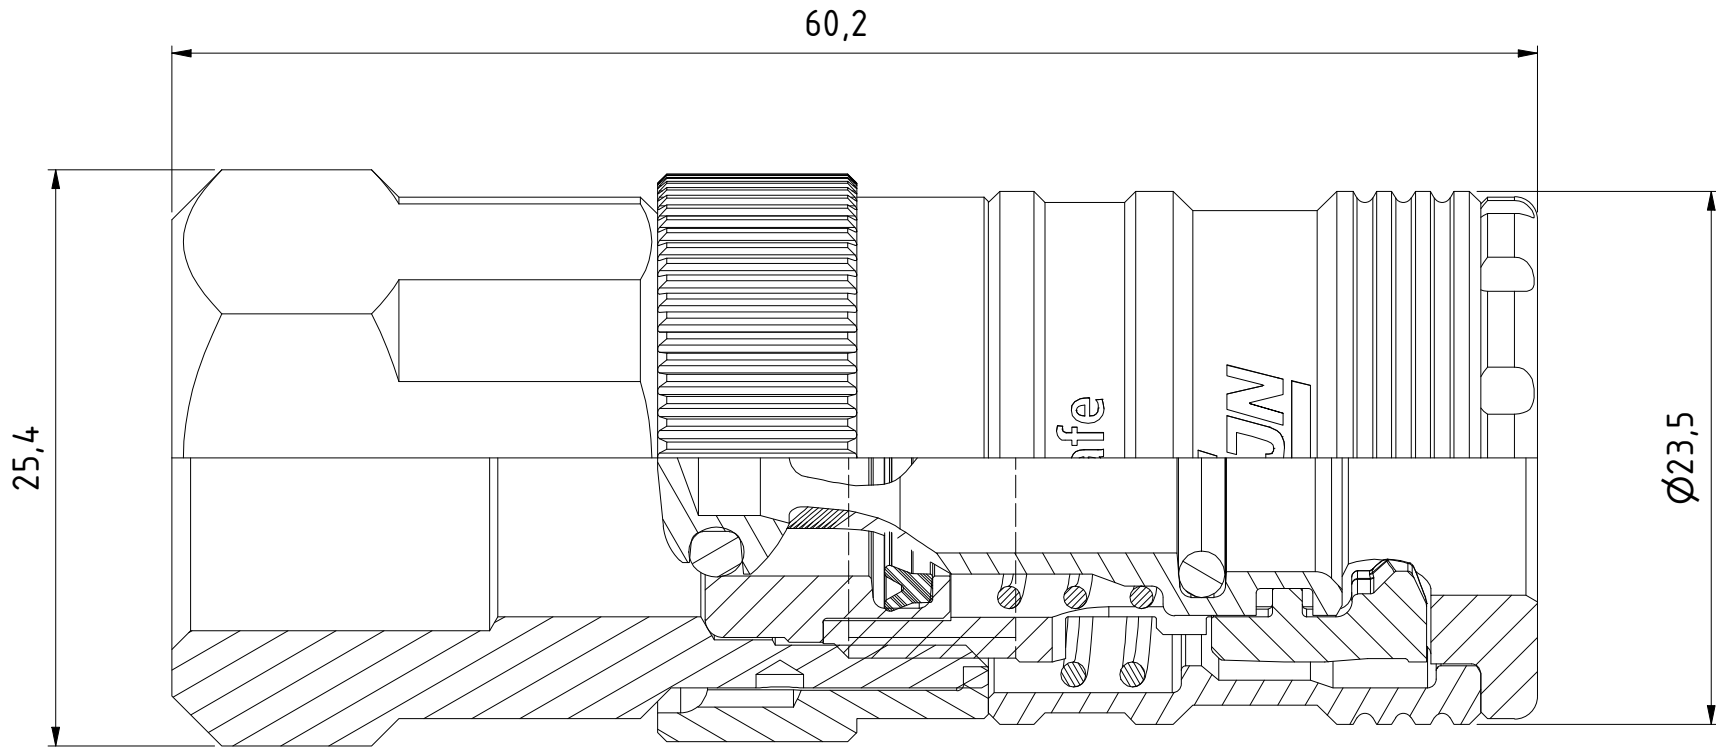


1 : 1

D


C

B

A



12	1	Valve seat	Aluminium Lead Free
11	1	Valve	Aluminium Lead Free
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 silver
2	1	Twist sleeve	Hard. Steel, Zn-Ni 10 black
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material

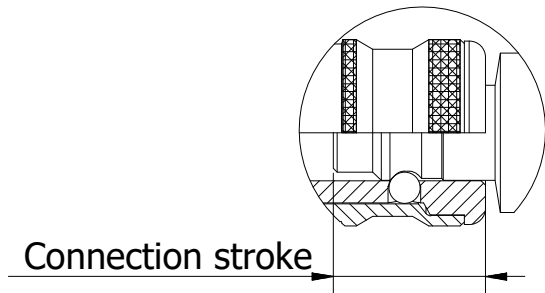

Connection stroke

State	Drawn	Checked	Approved	Date
Production	CABALAL	LIJA	OSJO	2025-02-03
ECO		Former No.		Scale
002136				3 : 1
Drawing No.			Issue	Sheet
103202244			B	1 /(1)



Coupling G 3/8" fem NBR - eSafe Safety Lock