



1 : 1

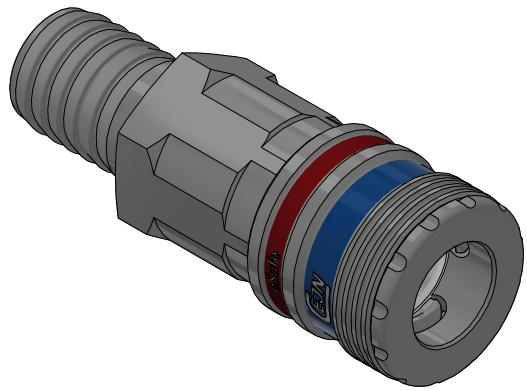

Product No.	104102006
Nominal flow $\phi$ DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 5/8" 16mm
Sealing material:	NBR

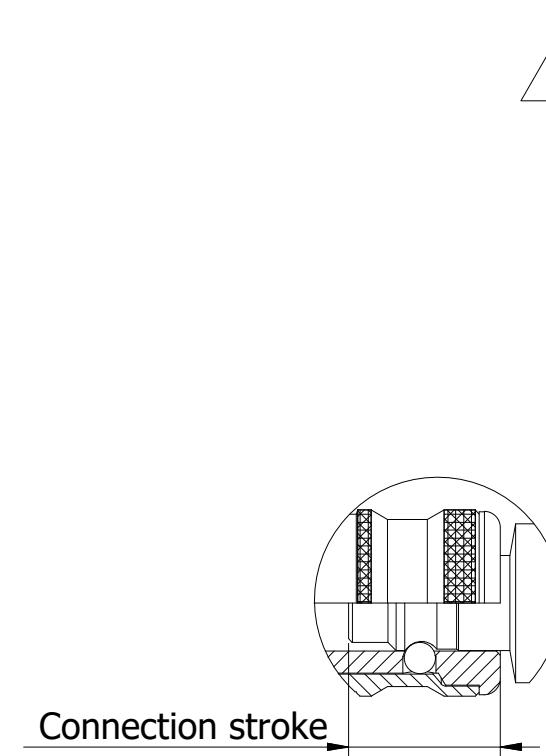

C

C

Item	Qty	Description		Material	
		State	Drawn	Checked	Date
12	1	Valve seat		Aluminum Lead Free	
11	1	Valve		Aluminum Lead Free	
9	1	Spring		Stainless Steel	
8	1	Spring		Stainless Steel	
7	1	Lip seal		NBR	
6	1	Quad-Ring		NBR	
5	1	O-ring		NBR	
4	1	Locking sleeve		Hard. Steel, Zn 8 silver	
3	3	Hook		Hard. Steel, Zn-Ni 8 transp.	
2	1	Front part		Hard. Steel Zn 8 Silver	
1	1	Back part		Steel, Zn 8 Silver	
		Description		Material	
		State	Drawn	Checked	Date
		Production	CABLIJA	ALAL	OSJO 2025-02-07
		Coupling 5/8" hose NBR - eSafe		ECO 002136	Former No. Scale 2 : 1
		Drawing No. 104102006		Issue C	Sheet 1 / (1)