

CAD system: Inventor
All rights reserved
This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





A3

D


C

B

A

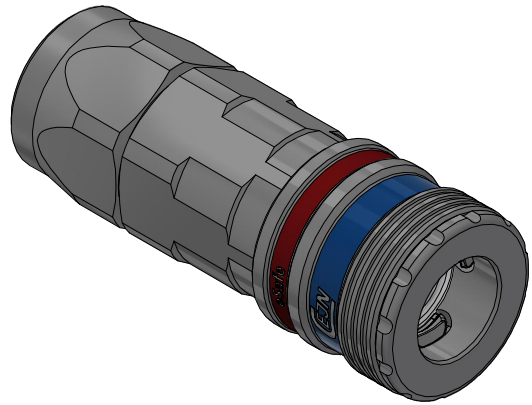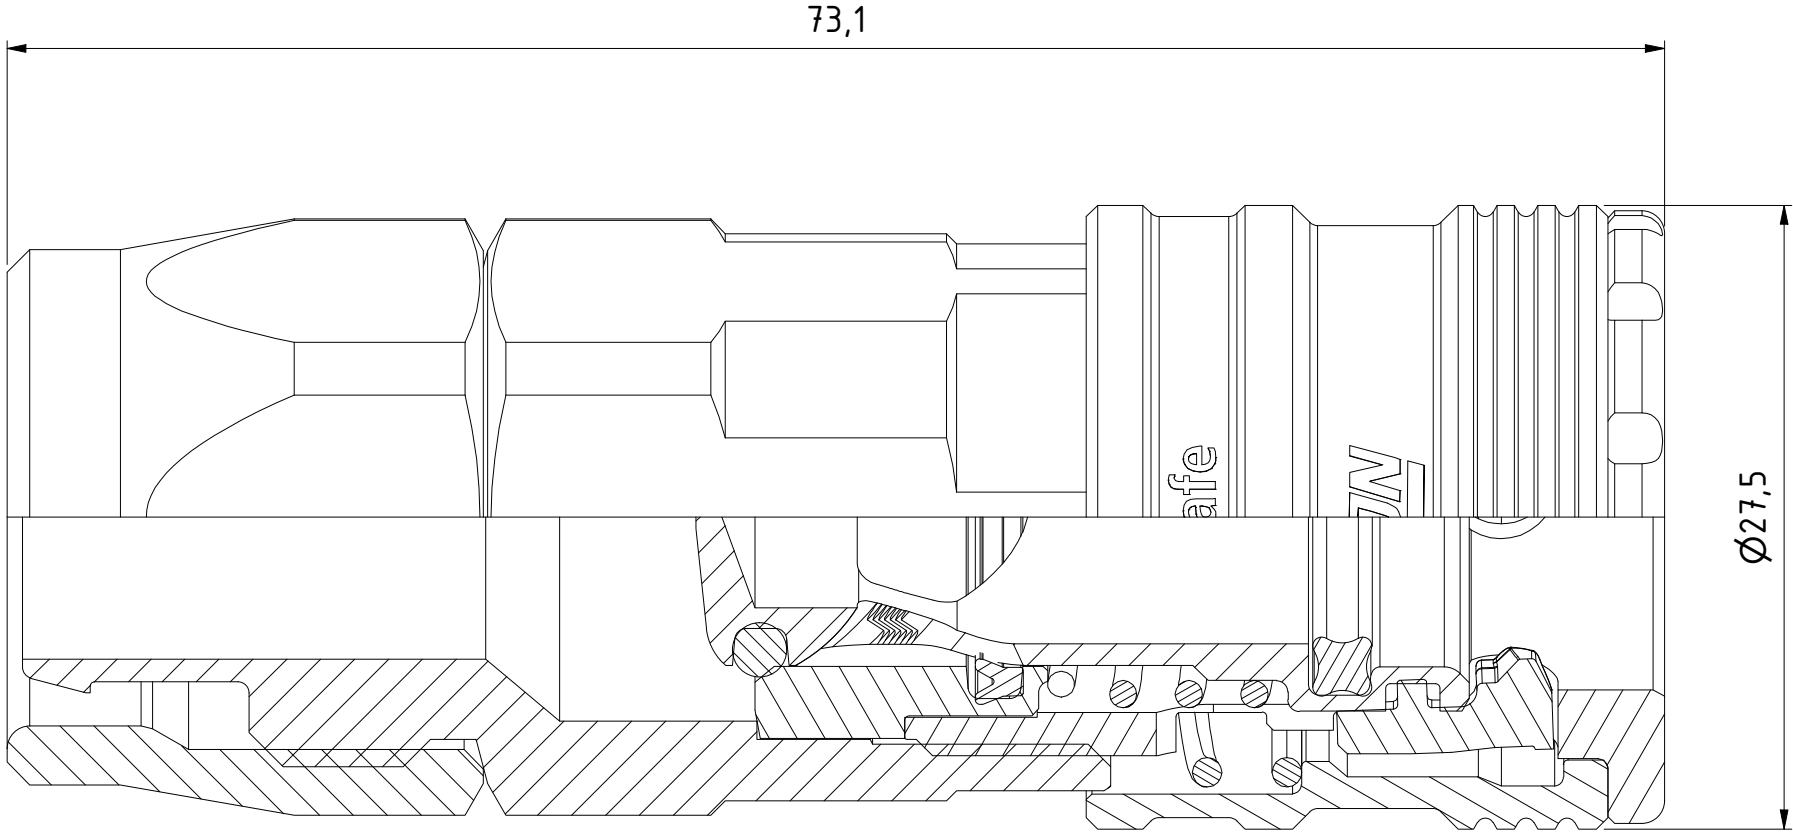


1 : 1



12	1	Valve	Aluminum Lead Free
11	1	Valve seat	Aluminum Lead Free
10	1	Spring	Stainless Steel
9	1	Spring	Stainless Steel
8	1	Lip seal	NBR
7	1	Quad-Ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. Steel, Zn 8 silver
4	3	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel Zn 8 Silver
2	1	Swivel nut 13x18	Steel, Zn 8 Silver
1	1	Back part 13x18	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
Approved		OSJO	Date
			2025-02-04
ECO		Former No.	Scale
002136			3 : 1
Drawing No.		Issue	Sheet
104102068		E	1 /(1)



Connection stroke

Product No.	104102068
Nominal flow Ø DN:	10,4 mm
Connection Stroke:	18,9 mm
Max WP Connected:	10 bar w. CEJN braided PUR hose
Min BP Connected:	40 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 13x18
Sealing material:	NBR
Hexagon:	24 (2x)



Coupling Stream-Line 13 x 18 mm - eSafe