

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A



1 : 1

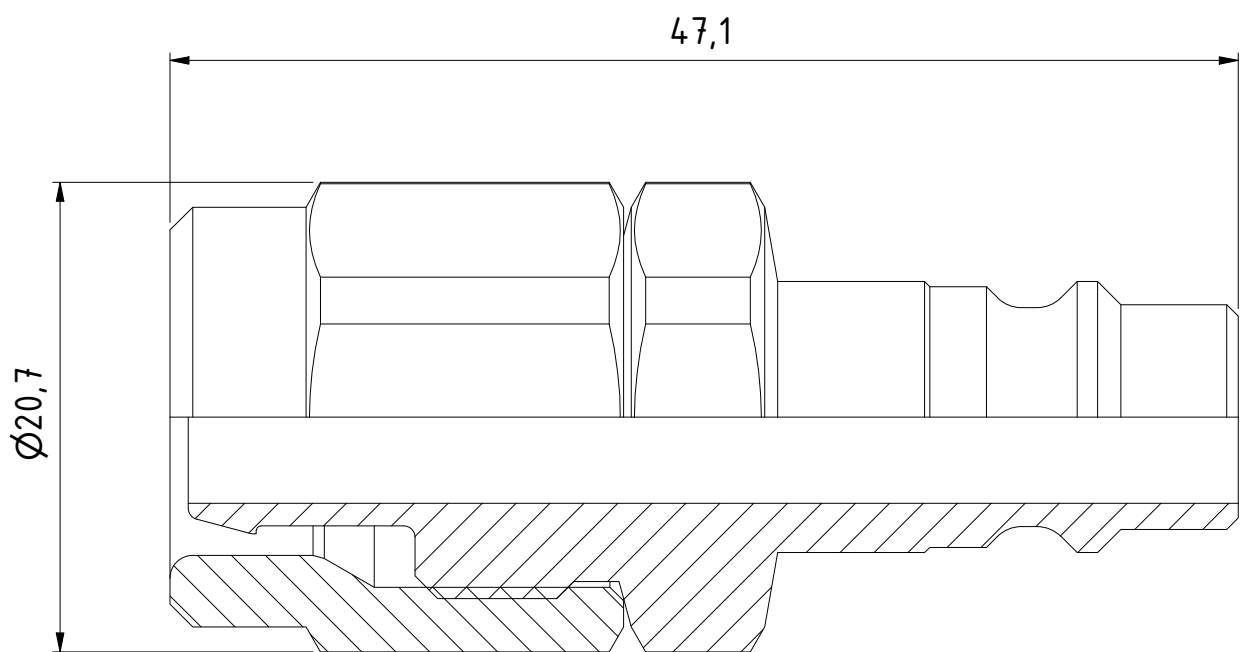

|                       |                                 |
|-----------------------|---------------------------------|
| Product No. 103205062 |                                 |
| Nominal flow Ø DN:    | 7,6 mm                          |
| Connection Stroke:    | mm                              |
| Max WP Connected:     | 16 bar w. CEJN braided PUR hose |
| Min BP Connected:     | 64 bar w. CEJN braided PUR hose |
| Temperature range:    | -20°C - +100°C                  |
| Connection:           | Stream-line 8x12                |
| Sealing material:     |                                 |
| Hexagon:              | 19 (2x)                         |

|                  |     |                       |                    |              |            |                 |
|------------------|-----|-----------------------|--------------------|--------------|------------|-----------------|
| 2                | 1   | Swivel nut 8x12       | Steel, Zn 8 Silver |              |            |                 |
| 1                | 1   | Nipple body 8x12      | Steel, Zn 8 Silver |              |            |                 |
| Item             | Qty | Description           | Material           |              |            |                 |
|                  |     | Scale 3 : 1           | Drawn CABANLA      | Checked JOTU | Appr. JOOL | ECO 12833       |
|                  |     | Drawing No. 503205062 |                    |              |            | Date 2020-03-17 |
| Assembly Drawing |     |                       |                    |              | Issue AD   | Sheet 1 /(1 )   |