
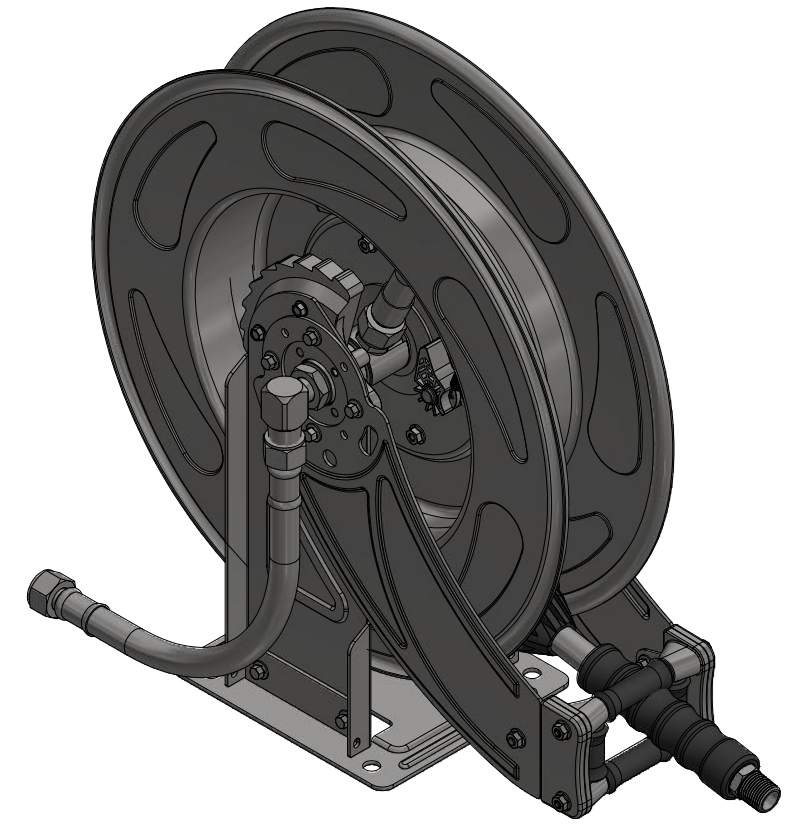

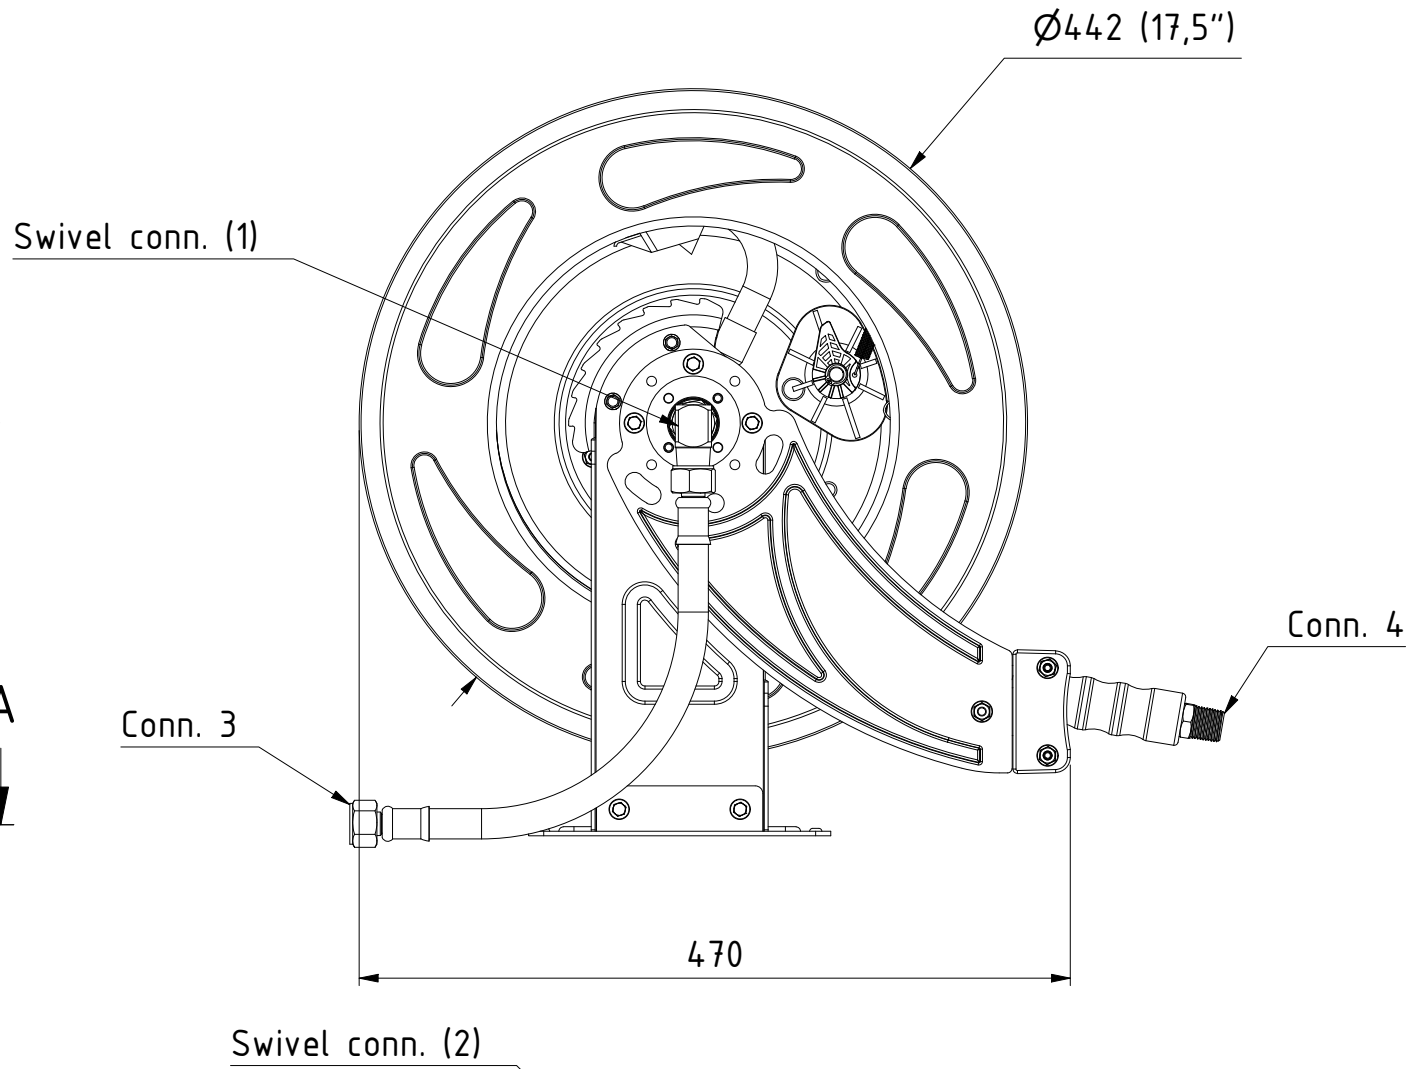


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

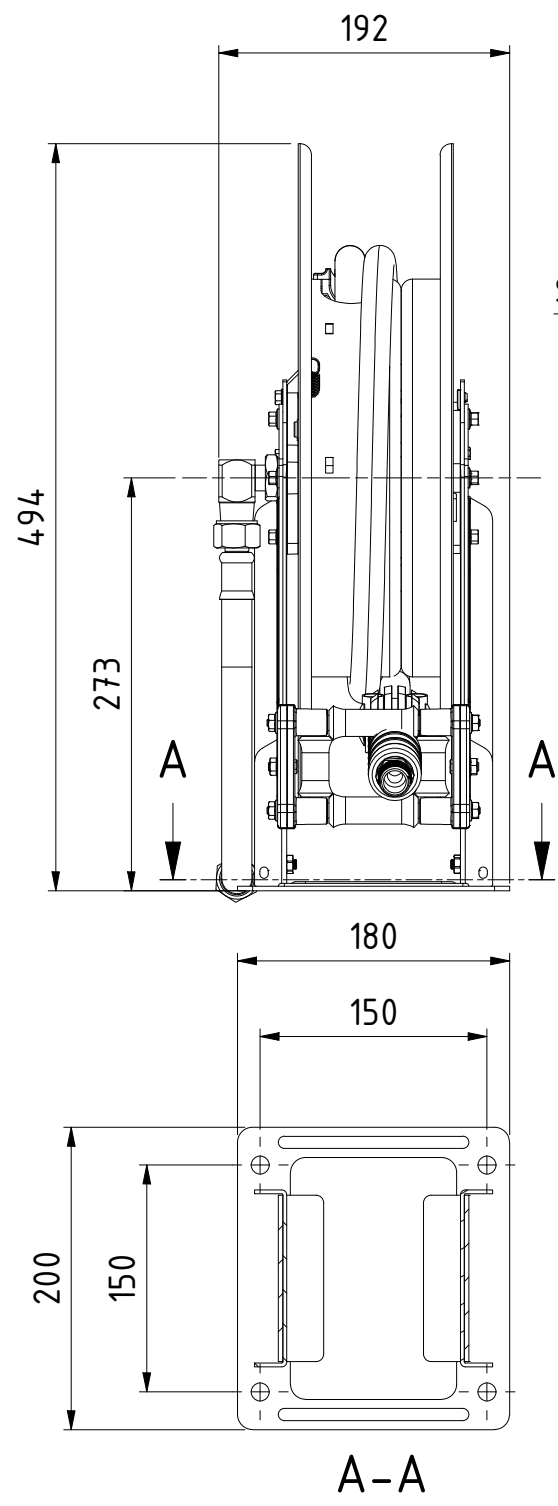

1 : 5

Technical Data:
IDxOD (mm): 13x20
Sealing material: Viton
Reel material: AISI 304 (Inlet conn. in brass)
Feeder hose length: 1m
Hose Reel Swivel connections:
INLET: R 1/2" male (1)
OUTLET: R 1/2" male (2)

Product Data - Stainless Steel Reels (Wash Down)

Art.no.	Hose length	Hose material	Weight [kg]	Conn. 3	Conn. 4	Max water temp.	Working Pressure
19 913 1016	15m (49 ft)	PVC	20	G 1/2" fem Swivel nut	R 1/2" male	70°C	10bar (140PSI) 70°C / 20bar (280PSI) 25°C
19 913 1035	15m (49 ft)	Rubber	20	G 1/2" fem Swivel nut	R 1/2" male	50°C	18bar (261PSI)



Scale	1 : 5	Drawn	CABLHE	Checked	JOOL	Appr.	OG	ECO	000984	Date	2021-07-08
Drawing No.									Issue		
Sheet									AA		
1 / (1)											

Assembly Drawing 509139902